


Multipurpose Cylinders

Series : LMC

Capacity : 50 - 150 Ton | Stroke Length : 50 - 332 mm | Working Pressure : 700 Bar

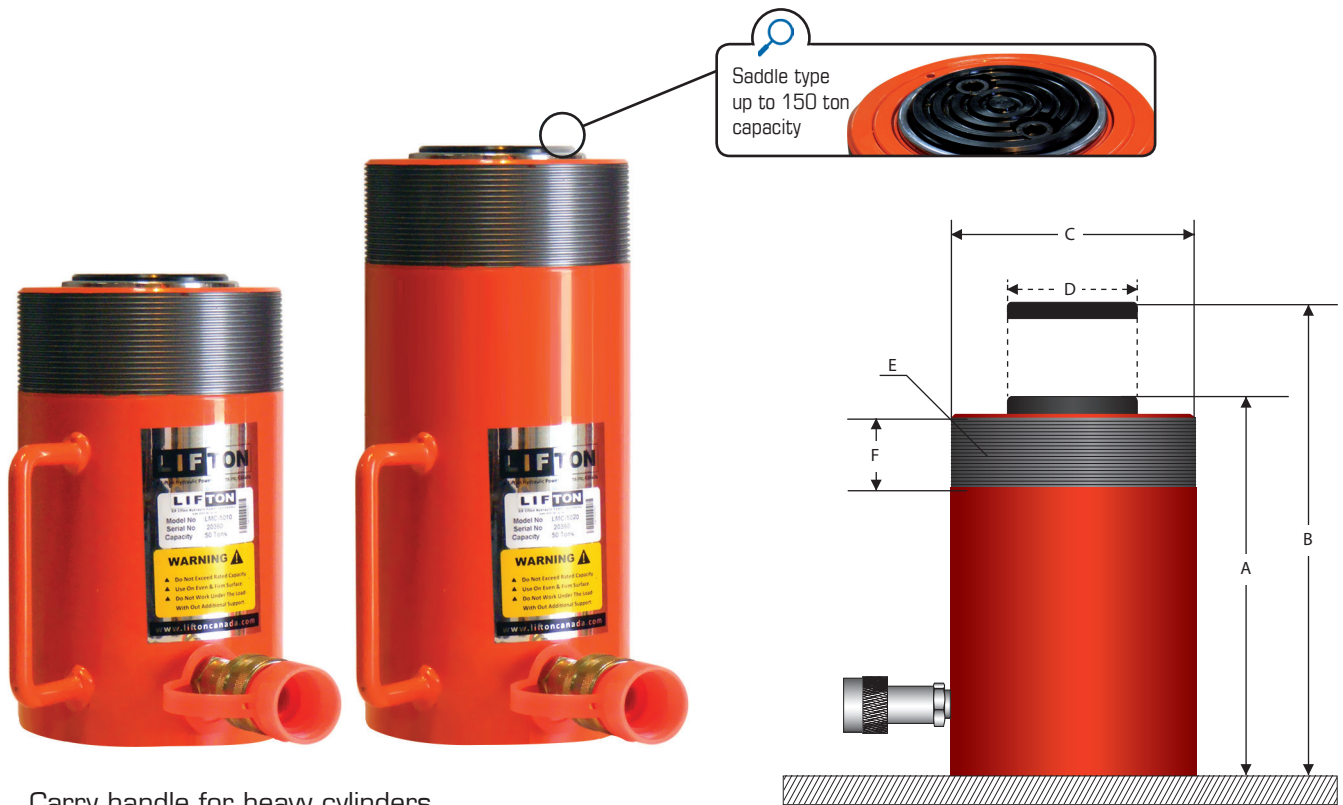

- Carry handle for heavy cylinders.
- Fitted with standard 3/8" NPT threaded female coupler.
- Supplied with removable saddles.

Model	Cylinder Capacity (Tons)	Stroke (mm)	Cylinder Effective Area (cm ²)	Oil Capacity (cc)	Retracted Height (mm)	Extended Height (mm)	Cylinder Out Dia. (mm)	Piston Rod Dia. (mm)	Collar Thread (mm)	Collar Thread Length (mm)	Metric Tonnes @ 700 Bar	Weight (Kg)
					A	B						
LMC 305	30	50	44.18	220	172	222	102	65	100 x 25.P	50	31.52	9.8
LMC 3010		100		440	222	322						12.5
LMC 3015		150		660	272	422						16
LMC 3020		200		880	322	522						17.5
LMC 5010	50	100	70.88	710	223	323	127	95	M125x2.5	50	50.57	20
LMC5015		150		1070	273	423						23.5
LMC5020		200		1425	323	523						27.7
LMC5030		300		2400	460	792						38
LMC10010	100	100	132.7	1330	226	326	168	110	M165x2.5	50	94.68	38.8
LMC10015		150		1991	286	436						49.2
LMC10020		200		2580	336	536						65
LMC10025		250		3100	386	636						73
LMC15010	150	100	201	2560	263	363	218	140	M215x3.5	50	143.43	65
LMC15015		150		3100	313	463						72